

**PLASTIC TUBE WATER FLOWMETERS, L-200 SERIES**




**FEATURES:** Its main parts are made from durable AS, ABS GREY plastic.  
Female ABS connectors.  
Corrosion resistant float and float guide made of stainless steel 316.

**APPLICATIONS:** It is widely used for the chemical and foodstuff industries.

Max pressure: 10 Bar  
Max temperature: 60 C

PART NAME	STANDARD	OPTIONAL
Meter tube	trogamid	---
Fittings	ABS	Brass or SS304
Floats	SS316	Orange ABS
Guide	SS316	SS304
O-rings	viton	EPR

Calibration: water 20C; Accuracy: 4%

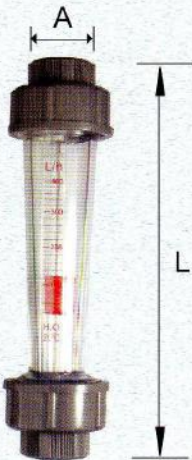

MODEL	RANGE (GPM/LPM)	CONNECTION	DIA(A)	LENGTH(L)
L200SD-3	0.4-4.0/1.6-16	3/4"BSP	25mm	230mm
L201SD-3	0.7-7.0/2.5-25	3/4"BSP	25mm	230mm
L202SD-3	1.0-10/4.0-40	3/4"BSP	25mm	230mm
L203SD-4	1.6-16/6.0-60	1"BSP	32mm	290mm
L204SD-4	2.5-25/10-100	1"BSP	32mm	290mm
L205SD-6	4.0-40/16-160	1-1/2"BSP	50mm	350mm
L206SD-6	7.0-70/25-250	1-1/2"BSP	50mm	350mm
L207SD-7	10-100/40-400	2"BSP	65mm	430mm
L208SD-7	15-150/55-550	2"BSP	65mm	430mm
L209SD-7	30-170/120-650	2"BSP	65mm	430mm
L210SD-7	50-260/200-1000	2"BSP	65mm	430mm